



For fast boarding

The systematic control of boarding passes, identity documents and biometrics is an integral part of the customer journey at the airport. With the Momentum[®] series, Magnetic offers airport operators, authorities and system integrators customised gates for all touch points. They speed up checks and allow the flow of people to gain momentum. The boarding gate mGo is designed for the verification of boarding cards and biometric features and offers a separate space for an optional printer.

The acceleration takes place in several areas: the 200,000 times proven drive and control units ensure extremely low opening and


closing times for the barrier elements. A large number of light sensors monitor the users, detect unauthorised behaviour and potential interruptions and actively counteract these. The quick replacement of drive and control units guarantees high system availability.

mGo can be configured individually: visually, different colours and materials are available; technically, mGo can be adapted to the requirements through multi-lane applications, gantry systems and mounting options for biometric devices. Control modules offer ample space for customer equipment.




Fast boarding pass check

mGo takes boarding pass checking to a new level. With intuitive operation, comprehensive monitoring and high reliability, a large number of travellers can be checked in the shortest possible time.



Comprehensive customisation

Momentum[®] has a modular design and can therefore be flexibly adapted to the requirements on site – in terms of design and biometrics as well as integration into the airport building and its digital infrastructure.



Simple integration

Momentum[®] provides the hardware for the digital security architecture. The pedestrian gates can be equipped with all common readers and are therefore particularly easy to integrate into existing data processing and security systems.



Innovative drive technology

The drive and control units are Magnetic's core technology. With its low-energy approach, the Magnetic Safety Drive System MSDS[®] combines high efficiency and economical operation with maximum personal safety.

- > High passenger throughput speeds up boarding considerably
- > Seamless integration into all common airport IT infrastructures
- > Easy maintenance and retrofitting due to modular design
- > Configurable according to individual requirements
- > Maximum passenger safety due to Magnetic Safety Drive System MSDS® with low-energy drive
- > Designed for 10 000 000 opening and closing cycles



Technical data	mGo
Application	Indoor
Passage width	Standard: 600 mm Wide lane: 900 mm (more on request)
Height of barrier elements	Standard: 1100 mm (more on request)
Opening/closing time	0.6–1.0 s ¹
Flow ratings (number of persons per minute)	25–35 PAX/min. ²
Drive technology	MHTM™
Control system	MGC plus
Parameter setting	Via API or web-UI
Power consumption	Maximum 250 W ³
Housing material	Aluminium and sheet steel powder-coated Stainless steel (on request)
Enclosure rating	IP32
Housing dimensions (L x H x W)	1745 x 1295 x 160 mm
Weight	A unit: approx. 110 kg B unit: approx. 140 kg C unit: approx. 160 kg
Escape route approval	Through emergency push-button
Emergency exit	Through emergency push-button
Temperature range	0 to +40 °C

¹ Depending on barrier element dimension; opening and closing times limited by low-energy drive and technical specifications for maximum impact forces.

² Depending on reader, lock setting, person behaviour.

³ Power consumption refers exclusively to Magnetic components.

Options

Document and bar code readers

Biometric devices

Printer

Tensator (customisation possible)

Key switch (different functional assignments possible)

Deboarding button

Buzzer for acoustic signalling

Failure locking for power failures

Uninterruptible power supply (UPS)

Guidance lights (green, orange and red)

Floor illumination


Customised glass panels (tinted/clear)

For additional options please contact your Magnetic supplier.

Potential applications



Standard colours (special colours on request)




Pure white, smooth glossy
(RAL 9010)




Jet black, fine structure matt
(RAL 9005)


mGo (2-line configuration) – front view

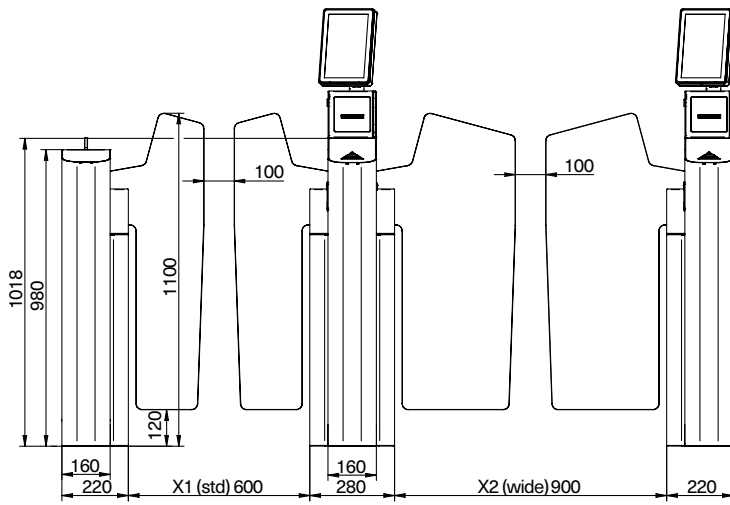

mGo (2-line configuration) – side view

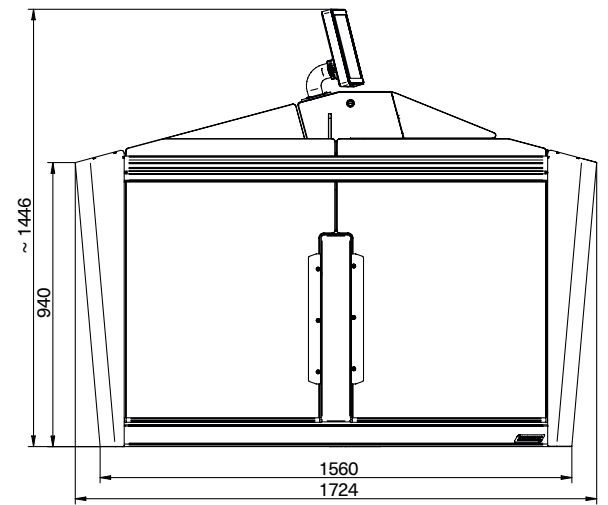

mGo (2-line configuration) – top view


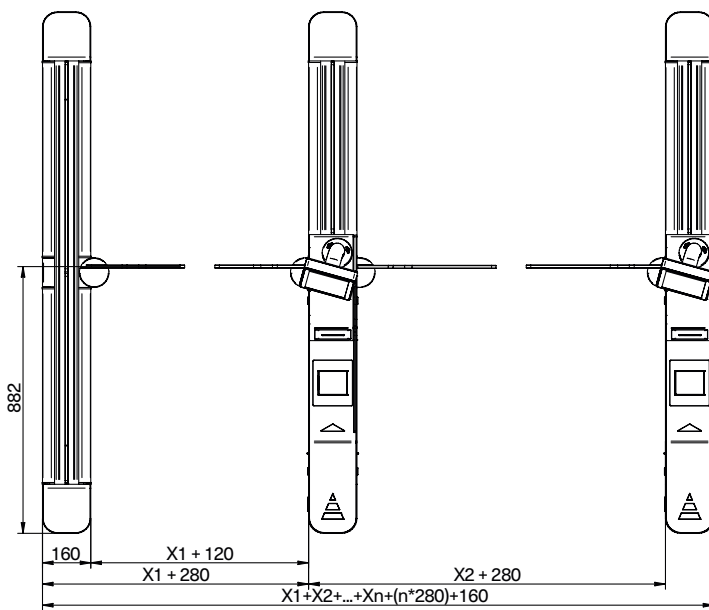


Access to Progress

Magnetic stands for high-quality vehicle barriers and pedestrian gates. With their thought-out design, innovative drive technology and extreme durability our products are well ahead of the competition. In addition, thanks to the experience in numerous market segments, our customers are offered precisely the access control solutions they require. We look forward to talking to you!

Find the Magnetic specialist in your area!

www.magnetic-access.com/worldwide

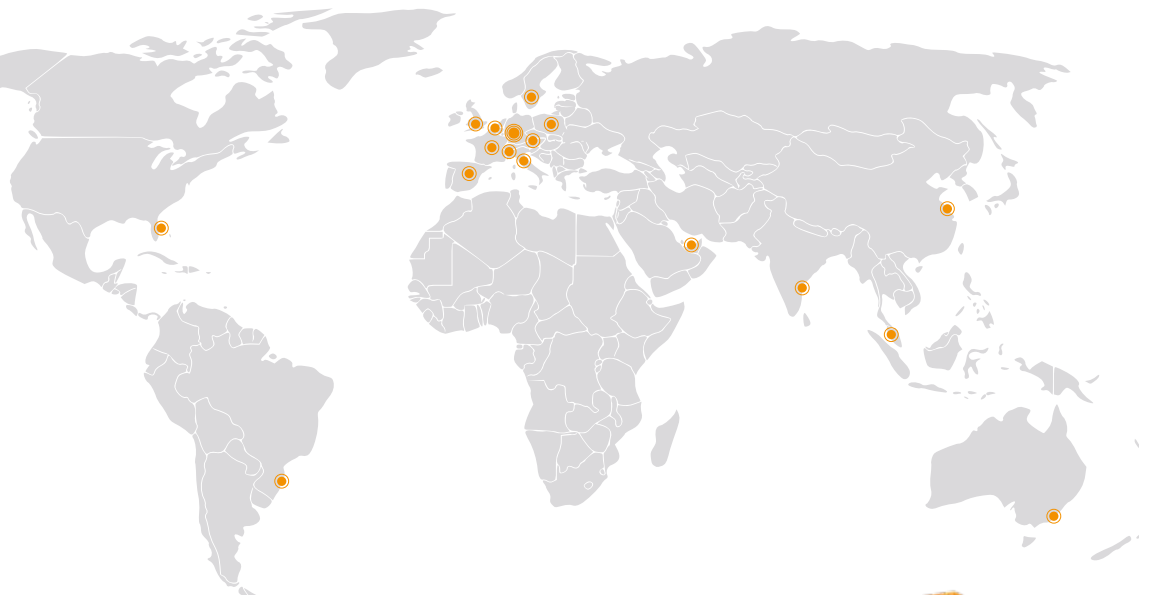

5807_0057EN_01



Vehicle barriers



Pedestrian gates



Terminals



FAAC TECHNOLOGIES is one of the top international players in access automation, parking and access control business in both the residential and industrial sectors. With a widespread presence on a global scale, we are always close to you and offer

you solutions for your individual market segment. We are proud to present Magnetic as a specialist for groundbreaking vehicle barriers and pedestrian gates in our group.