


YOUR ACCESS TO REVOLUTION

**MAGNETIC**<sup>®</sup>  
ACCESS TO PROGRESS



MAGNETIC AUTOCONTROL  
[www.magnetic-access.com/usa](http://www.magnetic-access.com/usa)

**FlowMotion**<sup>®</sup>  
**Pedestrian Gates**

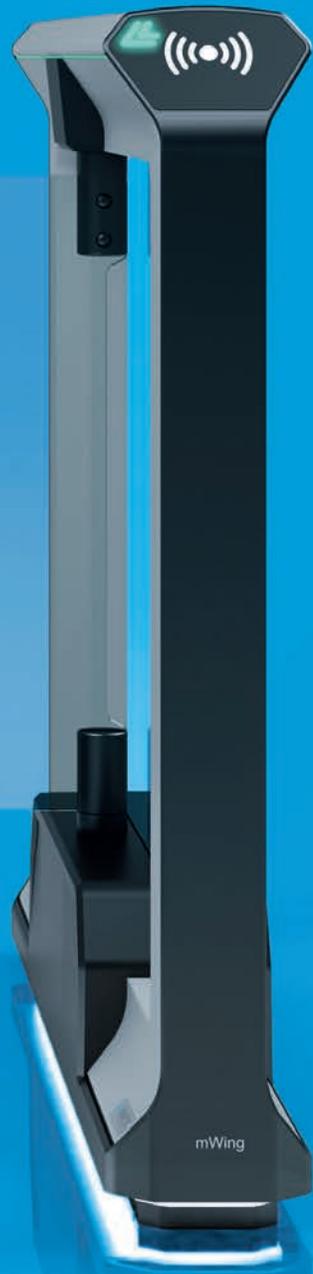

## YOUR ACCESS TO REVOLUTION

Development of pedestrian gates has long been a matter of evolution. Reading devices have become wireless, biometric recognition methods have sprung up, and personal data on authorized users are now digitalized and centrally administrated. Nothing very much has changed regarding the pedestrian gates themselves: housings made of steel sheet still stand in the way of authorized users.

We here at Magnetic have now set a new course towards revolution and completely reinterpreted security in buildings – with the Flow-Motion® product line of pedestrian gates. We no longer see access control systems as artificially superimposed security mechanisms, but as integral components of buildings. They are no longer external barriers, but paths within that welcome those entering the building and show them the way. We therefore not only increase user acceptance – we also make a major contribution towards greater security in buildings through the consistent and systematic assessment of all persons entering them.


In order to achieve this reinterpretation we have started again from scratch and fundamentally redeveloped our access systems from the bottom up. The result is a unique design whose flowing lines and wide range of colors permit seamless integration in the demanding architectures of companies, cultural institutions and public facilities. The prerequisite for the extraordinary design is a new material: mDure is not only extremely tough and long-lived, but its warm and friendly feel also gives visitors a comfortable first contact. And because we see our access systems as the path into buildings we have equipped them with versatile illumination that shows visitors the way and intuitively guides them through the access process.

Even if revolutions radically challenge what is old, in one regard we have remained true to our former concept: as before, you can rely on our energy-efficient, reliable and extremely long-lived drive and control technology.

## COME ON IN!

# A large family

The FlowMotion® range of models

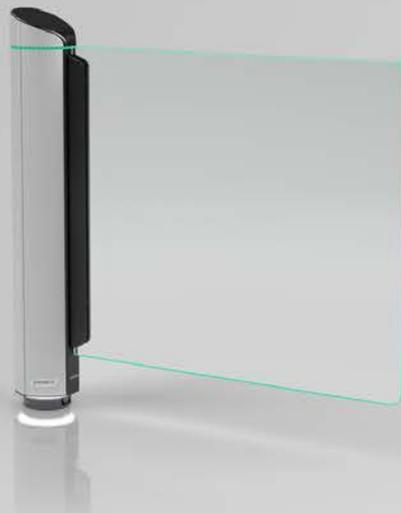

## mTripod / mTripod short

**The comfortable one:** its smooth drive and sensitive impact detection make passage through the mTripod and mTripod short particularly simple and comfortable.

### Barrier technology

Turnstile

### Opening and closing speed

Medium

### Security level

Low

## mSwing

**The versatile one:** you not only design optically appealing entrances with the mSwing swing door, it is also our specialist for wheelchair-friendly access and safe escape routes.

### Barrier technology

Swing door

### Opening and closing speed

Low

### Security level

Low

## mWing

**The elegant one:** an open housing, short opening times and flowing non-contact passage – no access solution is safer and more elegant than mWing.

### Barrier technology

Pedestrian passageway with wing gates

### Opening and closing speed

High

### Security level

Medium to high (depending on the barrier element)



### mTwing

**The transparent one:** the glass barrier elements and railing system provide a clear view into the building. But not just a view: they also prevent undercrawling and ensure reliable individualization.

#### Barrier technology

Half-height turnstile

#### Opening and closing speed

Low

#### Security level

Low

### mSlide

**The secure one:** nobody gets past this one – and certainly not over it. The barrier elements on the mSlide are up to 71 inches tall and separate sensitive areas with continuous glass panels.

#### Barrier technology

Pedestrian passageway with sliding doors

#### Opening and closing speed

High

#### Security level

Medium to high (depending on the barrier elements)

### mFlap

**The quick one:** unbeatable! mFlap offers the fastest opening and closing speeds of all our FlowMotion® pedestrian gates. They thus inspect large numbers of visitors in the shortest of times.

#### Barrier technology

Pedestrian passageway with wing flaps

#### Opening and closing speed

High

#### Security level

Low

# FlowMotion®

Fascinating aesthetics...




## Access control

The pedestrian gates of the FlowMotion® series can be controlled with all common reading devices. The sloping front faces allow installation of numerous card-reading methods, ensuring maximum flexibility.



## Design

The FlowMotion® series is characterized by its extremely slender silhouette, shapely form and flowing lines. The lean design harmonically integrates itself in architecturally demanding surroundings, and its inviting shape increases user acceptance.

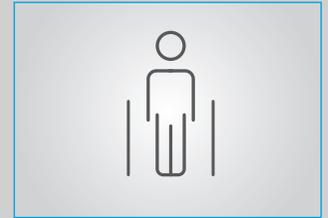

## Comfortable passage

The smoothly operating motor drive makes the access process particularly comfortable and its sensitive impact detection ensures maximum user safety.



## Unobstructed escape routes

FlowMotion® gates provide free passage if there is a power outage or alarm signal. With the optional drop-arm system, the upper arm swings down out of the way, enabling unhindered transit. When the alarm is over, or power has been restored, the arm automatically straightens up again.



## Secure access control

Light sensors (optional) raise the alarm if someone climbs over or crawls under the pedestrian gates. Interlocking in the closed state (optional) prevents any forced entry.



## Comprehensive functions

An emergency release routine, pulse counter, and random generator for screening users are standard in the FlowMotion® series, directly integrated in the control system.

**Haptics**

Unlike stainless steel, mDure is not cold and hard but instead feels comfortably warm and nice to touch. A friendly reception for visitors is thus provided on entering the building.

**Illumination**

Available frame-edge illumination highlights not only the lean design, but is also an important element of user interaction. Additional floor illumination can also be selected to further contribute towards reliable user guidance.

**Material**

The housing consists of the specially developed two-component polymer mDure. This new material opens up previously impossible design potentials.

# FlowMotion®

...excellent inner values...

## Control system

The MGC control system is at the heart of all FlowMotion® gates. It enables direct access to all functions, parameters and information – not even a notebook is required, thanks to the integrated display and control buttons. By the way, the same control system and drive technology are also used in Magnetic's vehicle barriers. This considerably reduces system diversity and training requirements for sales partners, commissioning engineers and plant operators.




## Construction

The systems are constructed using a rigid frame made of mDure, into which all other components are integrated. The side panels are attached to the frame without any visible connecting elements and thus create the impression of seamless construction.


## Drive

The thousand-fold proven MHTM™ drive technology ensures easy and smooth passage. It is maintenance-free, energy-efficient and quiet – and forms the basis for a long service life because it is designed for more than 10,000,000 opening and closing cycles.

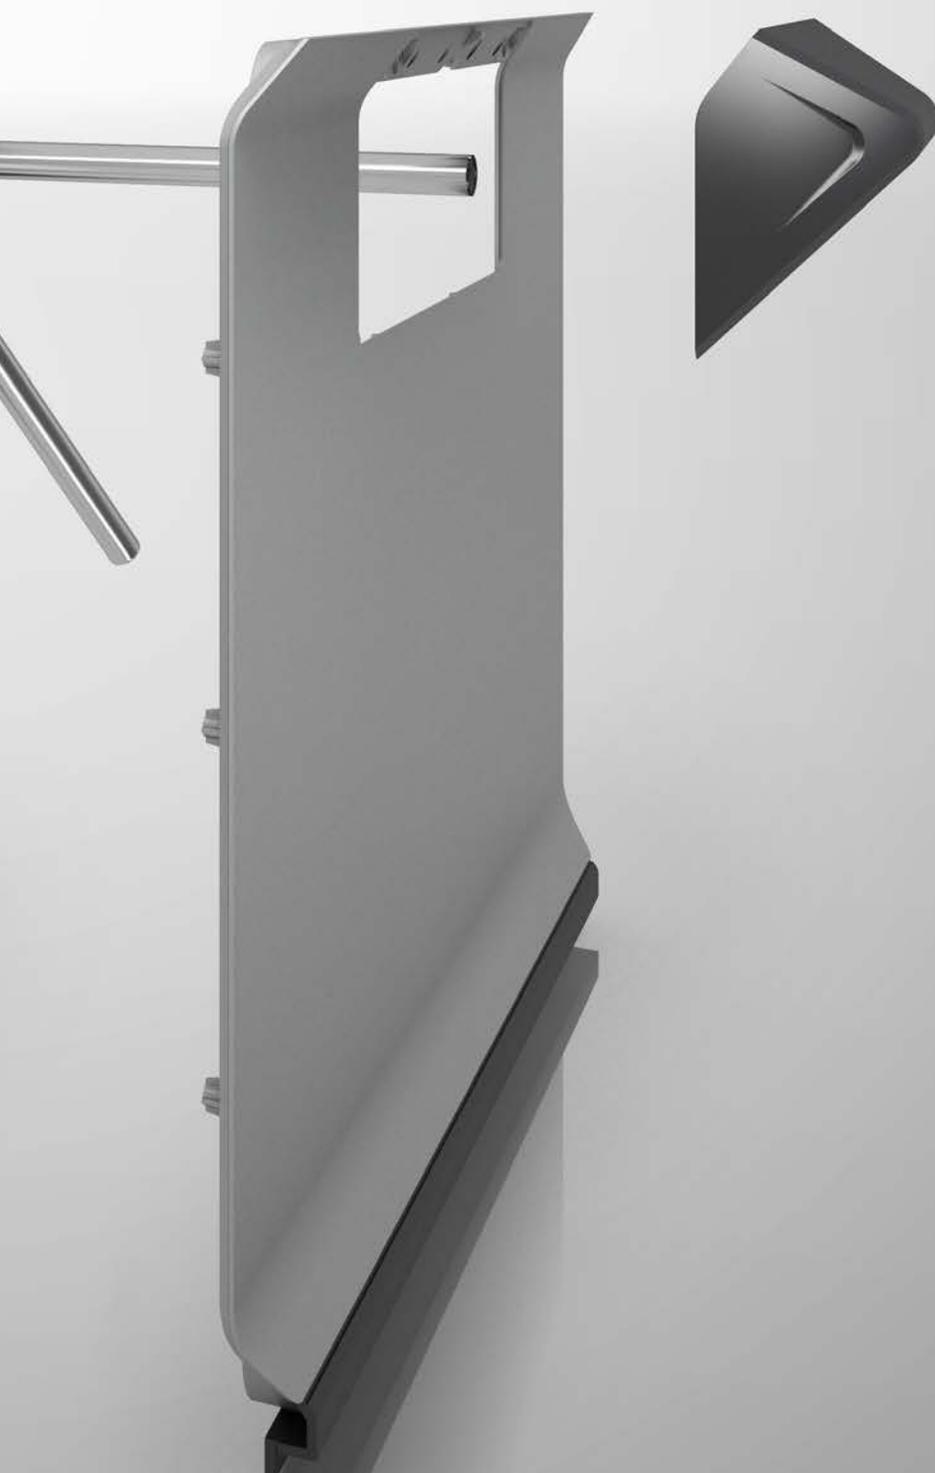

### Rapid installation

Our pedestrian gates are supplied ready for installation. All the selected options have already been installed, and the corresponding parameters pre-set, before delivery to the point of use. This and the drilling template considerably shorten commissioning times.



### Simple parameterization

All of the MGC control system functions and settings can be viewed and edited very quickly using the LCD display, the four buttons, and the well-thought-out user navigation. Commissioning never requires a notebook computer and connection cable.



### Complete documentation

Construction specifications, floor plans, dimensional drawings, technical data – our customers receive all relevant documentation on the mTripod. They are thus always prepared with the necessary details during project planning, commissioning, or when requested for a certification of conformity.



### Comprehensive training

We offer factory-based and onsite technical training to our integration partners for both pedestrian and vehicle access products. This ensures high installation quality and excellent service.

# FlowMotion®

...and unique options.

## Frame-edge illumination

The elegant integrated light elements offer flexible use to show operational readiness, the direction of passage, or the validity of access authorization.



## Ethernet interface

Today's connections for the buildings of tomorrow: FlowMotion® gates can be integrated into building control systems via the Ethernet interface.

## Floor illumination

The white floor illumination gives the gates the appearance of floating in a cloud of light and simplifies orientation in the entrance area for visitors.

## Interlocking

The gate elements can be locked in the closed state. This effectively prevents attempts to wilfully or forcefully gain access.


**Passage direction indicator**

The light elements in the front face show visitors at a glance if passage is open to them and whether they have valid access authorization.




**Base frame**

The base frame can be installed straight after completion of the bare floor. It not only reserves the space for subsequent installation of the FlowMotion® pedestrian gate, but also considerably simplifies the laying down of electricity and data cables.

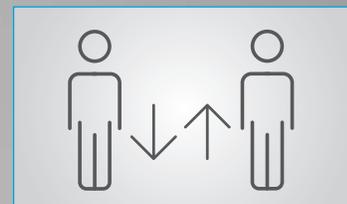

**Full flexibility**

Visitor flows into the building in the morning, out of the building in the evening, and coming and going between the two – FlowMotion® gates offer flexible use thanks to their bi-directional operation.

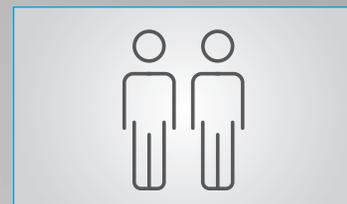

**Large visitor numbers**

It makes sense to use several parallel lines if large numbers of visitor authorizations need confirmation within a very short time. All FlowMotion® pedestrian gates are suitable for the straightforward setting up of multiple applications thanks to their uniform stylistic language and control technology.



**Wheelchair-friendly access**

Variants of the FlowMotion® gates are available with large passage widths for wheelchair users, the transport of material, and many other requirements. mSwing swing doors offer another alternative for providing wheelchair-friendly access.



**Unobstructed escape routes**

All the gates in the FlowMotion® series automatically allow free passage in the case of a power outage or an alarm signal. mSwing swing doors allow the setting up of particularly wide, officially approved escape routes.



*They don't match  
everything.*

Just your precise requirements.





Seamless integration in demanding architectures – we developed the design of FlowMotion® with this goal in mind. This, however, not only includes the housing shape, but also its color. This is why we offer all the products in our FlowMotion® family with a wide range of color tones and effect finishes.

**WHICH COLOR IS YOURS?**



# Security in series

With customized multiple applications



## Access solutions that meet your needs

High visitor numbers, wheelchair-friendly access, escape routes during emergencies – a single gate is often insufficient to meet all the requirements. But here, too, the extremely slender design and uniform stylistic language of FlowMotion® gates prove advantageous because they allow the particularly simple implementation of space-saving multiple applications.

Several gates can be arranged in rows to enable the rapid and reliable control of large numbers of visitors. With mWing, mSlide and mFlap we offer left, central and right modules with adapted barrier elements; a housing is available for mTripod without barrier elements for the end of a row.

Wheelchair-enabled access requires a larger passage width so that users, as well as delivery services, have sufficient space for passage. The three pedestrian passageways – mWing, mSlide and mFlap – are available in wider variants, permitting passage widths of up to 38 inches.

Escape routes must comply with special legal and technical requirements. They must be readily identifiable and easy to open. They must also offer a particular passage width depending on the number of persons in the building. The mSwing swing door is our specialist for escape routes: as a single installation can provide a passageway width of 47 inch, and as much as 94 inches as a double installation.



## AN INNOVATIVE MATERIAL FOR INNOVATIVE PRODUCTS

An extremely slender silhouette, soft flowing lines, and a warm gentle feel – this has all been made possible because we have moved away from the stainless steel panels used up to now and turned to a new material: **mDure**.

**mDure** is a polyurethane and thus consists of two components. During its production, polyols and isocyanates react to make long-chain molecules that form spatial links with one another. The end-product can be precisely adapted to meet particular

requirements because thousands of combinations of different polyols and isocyanates are possible. In many respects, **mDure** far surpasses the performance of the previous standard material.

By the way: although we are taking new paths we are not experimenting. Comparable high-performance polyurethanes are used for housings in medical and laboratory technology, for vehicle dashboards, and for cladding on high-speed trains. Could **mDure** have better references?


- > **mDure** is created by a chemical reaction that takes place directly in the forming tool. This provides extraordinary design freedom.
- > **mDure** is highly resistant to impacts, scratches and abrasion. It can cushion mechanical effects without suffering any lasting deformation.
- > **mDure** is a thermal and electrical insulator. This simplifies electrical installation, as well as operation under difficult climatic conditions.
- > **mDure** is extremely durable and chemically resistant – against disinfectants and detergents, as well as against aggressive chemicals, UV radiation and corrosion.
- > **mDure** contains no solvents or softening agents so it does not give off any harmful emissions to its surroundings. It also offers low flammability, and is therefore ideal for indoor use.
- > **mDure** is free of pollutants and can be recycled, disposed of as household waste, or burnt without polluting the environment.



# mTripod

## Three-arm turnstile

- > Revolutionary design, won German Design Award 2018
- > Extensive functions and intuitive operation
- > Drop-arm mechanism (optional) permits passage during power outages or alarms
- > Ethernet plug-in module for IP connection (optional)
- > Designed for more than 10,000,000 opening and closing cycles

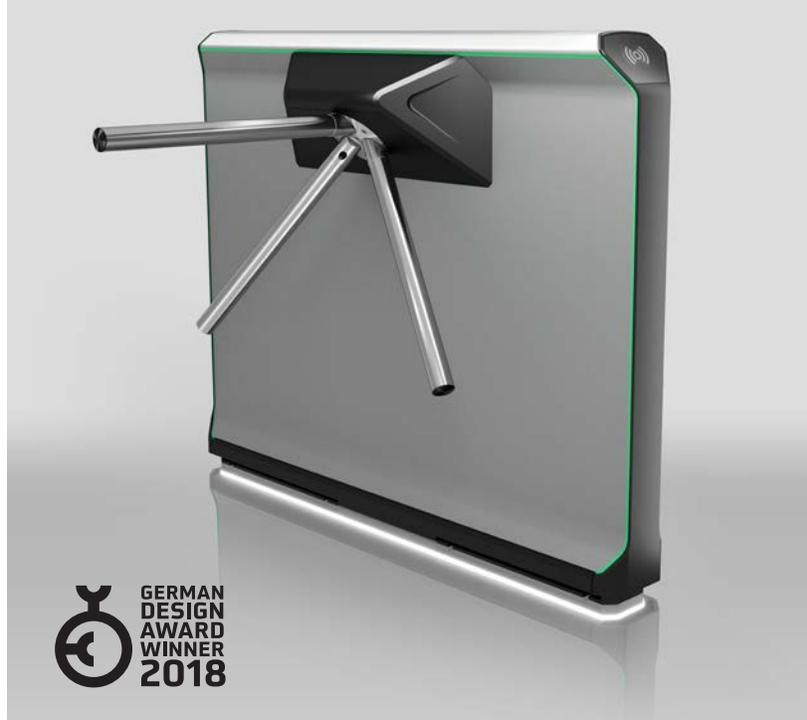


Technical data	mTripod	mTripod short
Housing variants	Long	Short
Application	Indoor and outdoor	Indoor and outdoor
Passage width	20.3 inches	20.3 inches
Drive technology	MHTM™	MHTM™
Control system	MGC	MGC
Voltage	100–240 VAC, 50/60 Hz	100–240 VAC, 50/60 Hz
Power consumption	Typical 30 W	Typical 30 W
Duty cycle	100%	100%
Housing material	mDure	mDure
Housing dimensions (L x W x H)	51.2 x 11.4 x 41.3 inches	28.7 x 11.4 x 41.3 inches
Enclosure rating	IP 54	IP 54
Weight	154.3 lb	125.6 lb
Temperature range	-22 to +131 °F	-22 to +131 °F

Equipment	
Standard color	Basalt (sides) Anthracite (frame)
Direction of passage	Freel
Emergency release	On power outage or closing of alarm contacts
Random generator	Integrated in control system
Throughput data acquisition and event log	Integrated in control system


Options	
Special colors	More than 20 color tones available according to pricelist
Passage direction indicator	✓
Floor illumination	✓
Frame-edge illumination	✓
Warning on forced entry	✓
Interlock against forced entry	✓
Climb-over protection	✓
Crawl-under protection	✓
Ethernet connection	✓

Accessories	
Emergency button	For triggering the alarm contacts and unlocking the turnstile or initiating the drop-arm process (optional)
Base frame	For integration in new buildings, height adjustable between 3.9 and 5.9 inches
Escape routes and wide passageways	mSwing swing door for escape routes and wide passageways
User guidance and separation of access areas	mGuide railing system for user guidance and the separation of controlled and uncontrolled areas
Adhesive plate	For adhesive mounting on finished floors


mTripod view from side

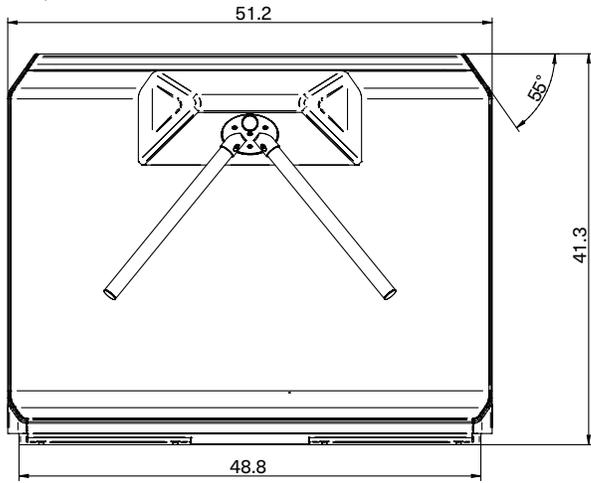


mTripod short view from side

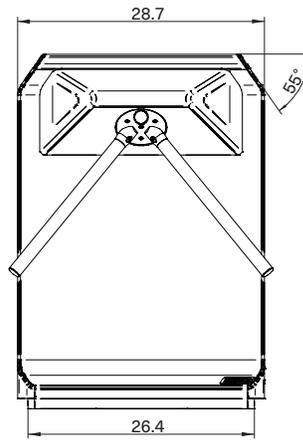


mTripod view from above

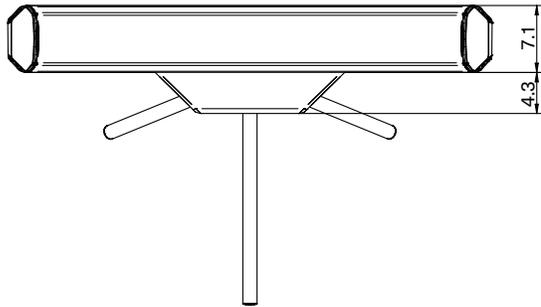


mTripod short view from above

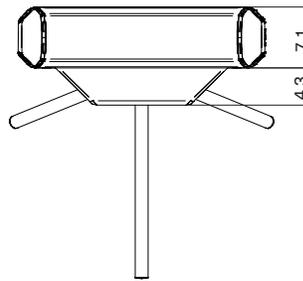

mTripod view from front

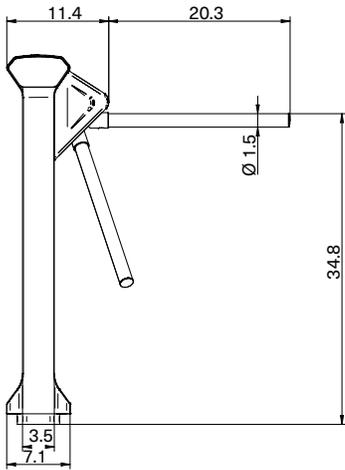

mTripod short view from front

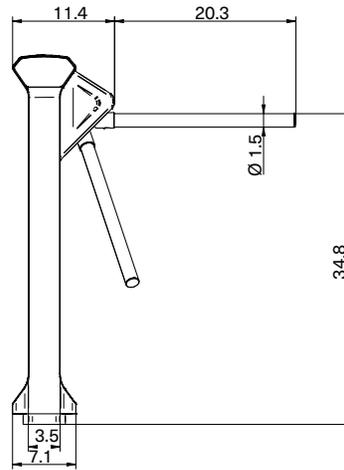

Potential applications



Mounting space for reading devices for mTripod and mTripod short (without passage indicator, mounting depth 1.5 inches)

# mWing

## Pedestrian passageway with wing gates

- > High visitor throughput thanks to rapid opening times and preset travel function
- > Open-gate mode for extra throughput acceleration
- > For maximum security requirements in monitored and unmonitored areas
- > Low impact forces for maximum personal safety
- > Freely turning on power outages
- > Designed for 10,000,000 opening and closing cycles



Technical data	mWing
Application	Indoor and outdoor
Passage width	Standard: 23 inches Wide Lane: 36 inches (more on request)
Total width for 1 line	38 inches (with 23 inch passage width) 50 inches (with 36 inch passage width)
Height of barrier elements	Standard: 35 inches High: 71 inches (more on request)
Opening/closing time	0.6 – 1 s, depending on barrier element dimensions
Drive technology	MHTM™
Control system	MGC
Voltage	100–240 VAC, 50/60 Hz
Power consumption	Maximum 45 W
Duty cycle	100%
Housing material	mDure
Housing dimensions (L x W x B)	51.2 x 41 x 7.1 inches
Enclosure rating	IP 54
Weight	About 265 lb per module
Temperature range	-22 to +131 °F


### Options

Special colors	More than 20 color tones available according to pricelist
Barrier elements	Glass wing made of single-layer safety glass (ESG) or acrylic glass, customer-specific barrier elements
Wide passageway	Wide-lane configuration, 36 inch width
Passage direction indicator	✓
Floor illumination	✓
Frame-edge illumination	✓
Warning on forced entry	✓
Interlock against forced entry	✓
Ethernet connection	✓


### Accessories

Emergency button	For triggering the alarm contacts and unlocking the barrier elements
Base frame	For integration in new buildings, height adjustable between 3.9 and 5.9 inches
Escape routes and wide passageways	mSwing swing door for escape routes and wide passageways
Separation of access areas	mGuide railing system for the separation of controlled and uncontrolled areas
Adhesive plate	For adhesive mounting on finished floors

mWingstandard from side

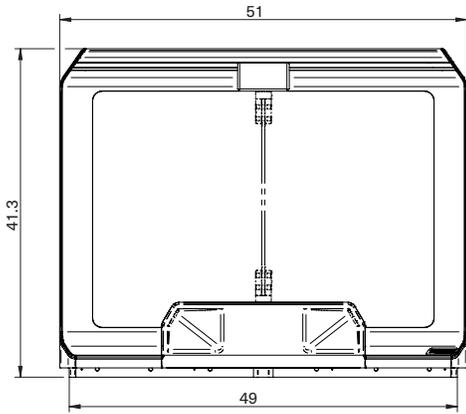


mWing standard view from front

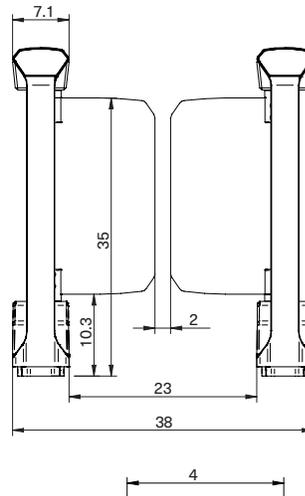


Lorem ipsum


mWing view from above (1 module)

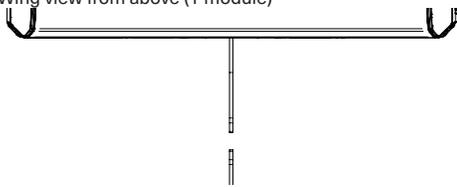

Mounting space for reader devices  
(without optional passage indicator, mounting depth 1.5 inches)



Line configuration of mWing with passage in standard width and with wide passageway

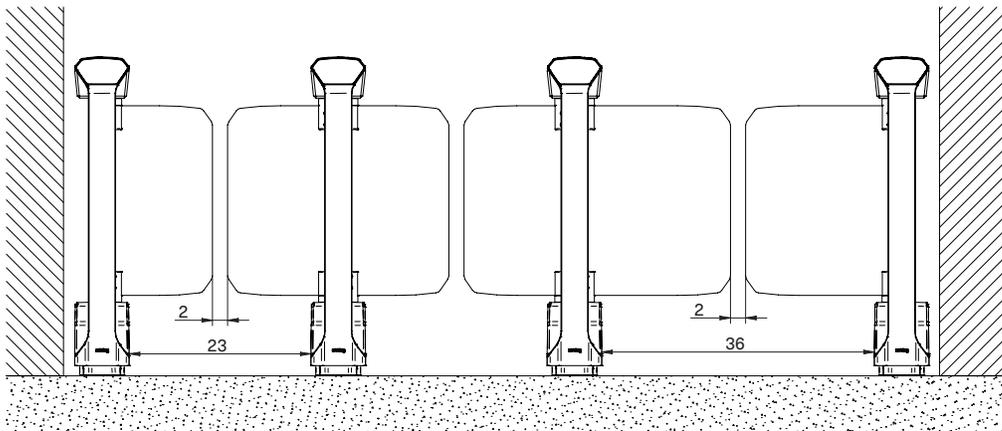

Potential applications



Equipment

Standard color	Basalt (sides) Anthracite (frame)
Direction of passage	Uni- or bi-directional
Escape routes	mSwing swing doors for escape routes
Emergency release	On power outage or closing of alarm contacts
Random generator	Integrated in control system
Throughput data acquisition and event log	Integrated in control system

The dimensions shown apply for the standard versions of our products. The dimensions can vary with different passageway widths and door heights. Subject to technical modifications.

# mSwing

## Swing doors

- > As single or double doors for visitor entrances, passage with baggage, transport routes and wheelchair-friendly access
- > For unobstructed escape routes in emergencies
- > Ideally complements the mTripod access control system
- > Compact accommodation of drive and control systems in the centre column
- > Low impact forces for maximum personal safety
- > Freely turning on power outages
- > Designed for 10,000,000 opening and closing cycles



Technical data	mSwing
Application	Indoor and outdoor
Passage width	Standard: 39 inches Wide Lane: 47 inches (more on request)
Barrier element height	Standard: 39 inches (more on request)
Opening/closing time	1.5–4 s, depending on barrier element dimensions
Opening angle	Adjustable from 0–300°
Drive technology	MHTM™
Control system	MGC
Voltage	100–240 VAC, 50/60 Hz
Power consumption	Maximum 45 W
Duty cycle	100%
Housing material	Aluminum
Housing height	43 inches
Housing diameter	Maximum 7.2 inch
Enclosure rating	IP 54
Approvals	Approved for escape and rescue routes
Weight	About 88 lb
Temperature range	–22 to +131 °F


### Options

Special colors	More than 20 color tones available according to pricelist
Barrier elements	Glass doors made of single-layer safety glass (ESG) or acrylic glass, customer-specific barrier elements
Passage width	up to 94 inches as double swing doors
Floor illumination	✓
Glass edge illumination	✓
Warning on forced entry	✓
Ethernet connection	✓


### Equipment

Standard colors	Basalt (column) Anthracite (cover)
Interlock against forced entry	✓
Direction of passage	Uni- or bi-directional
Emergency release	Can be parameterized: fixed position or freely turning
Reaction on power outage	Freely turning
Random generator	Integrated in control system
Throughput data acquisition and event log	Integrated in control system

mSwing view from side




mSwing view from front

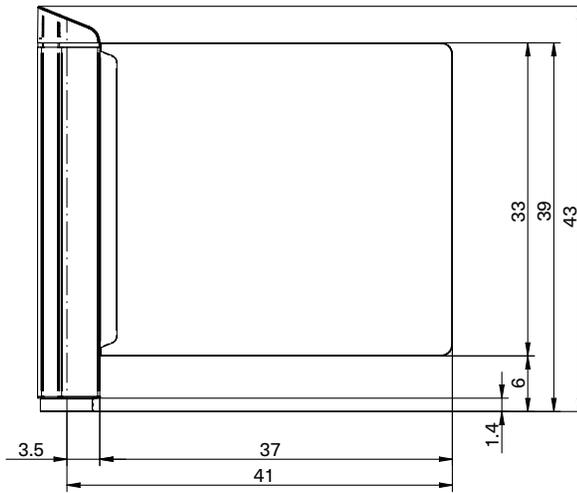

mSwing view from above



Line configuration with mTripod and mSwing as double swing gate

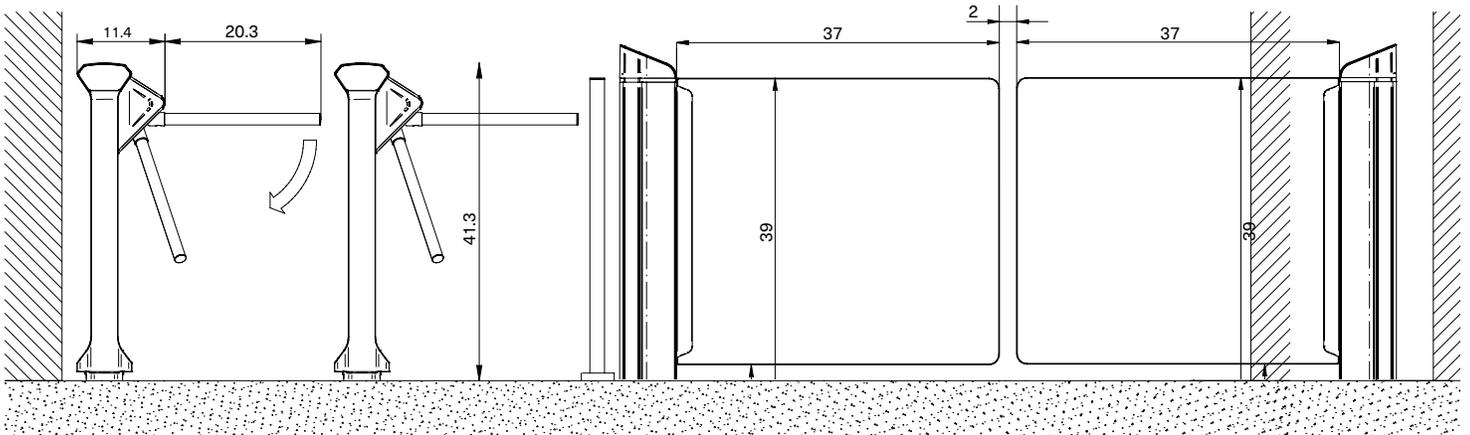

Potential applications



Accessories

Integration of card readers	mPost card reader column
Passage direction indicator	Passage direction indicator for mPost
Emergency button	For triggering the alarm contacts and unlocking the barrier elements
Foundation frame	For integration in new buildings, height adjustable between 10 and 15 cm
Separation of access areas	mGuide railing system for the separation of controlled and uncontrolled areas

# mGuide

## Railing system


- > Separation of areas for controlled and freely accessible zones
- > Ideal supplement as user guidance system for the FlowMotion® pedestrian gates
- > Clear transparent design seamlessly integrates into demanding architectures
- > Individually adaptable to point of use thanks to flexible width
- > Safety glass provides maximum user safety




Technical data	mGuide
Barrier width	Up to 51.2 inches
Barrier element thickness	0.39 inch
Housing material	Stainless steel 304
Housing height	39.4 inches
Housing diameter	4.1 inches at base, 1.7 inches at rim

Options	
Barrier elements	Glass panels made of single-layer safety glass (ESG) or acrylic glass, customer-specific barrier elements


mGuide view from above



mGuide view from front

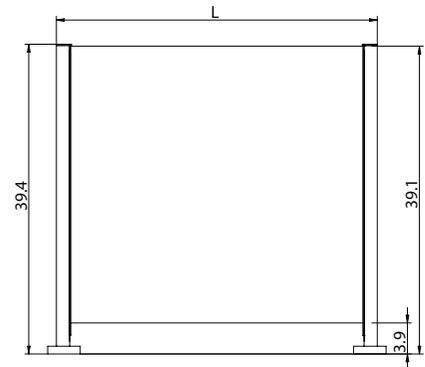

Line configuration with mSwing, mTripod and mGuide as user guidance and barrier element

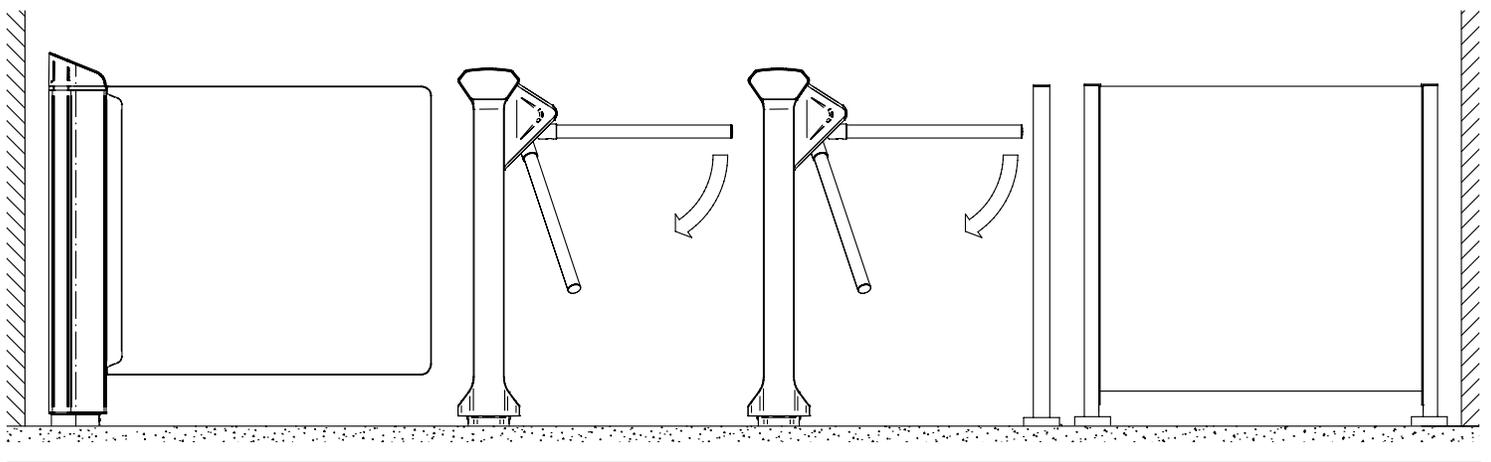

## MAGNETIC – YOUR ACCESS TO PROGRESS

Magnetic Autocontrol stands for pioneering products and solutions – in every way. Our pedestrian gates and vehicle barriers open the path for thousands of people every day – in buildings, stations and airports, just as in car parks and at toll stations. Our technology is also pioneering: excellent func-

tionality and user-friendliness, extraordinarily long service lives, and a high level of safety take our customers that extra step further. That is why our motto is “Access to Progress”.

Try us out! We are available for you worldwide.



### Headquarters

Schopfheim, Germany  
[www.magnetic-access.com](http://www.magnetic-access.com)

### Subsidiaries

- Australia
- Benelux countries
- Brazil
- China
- France
- India
- Middle East
- North and South America (excl. Brazil)
- Austria
- Scandinavia
- Southeast Asia

### Competence in access control

Revolutions question existing systems; but revolutions are also always built upon their predecessors. This also applies for FlowMotion®. Our new generation of pedestrian gates is very different from our earlier products – but our decades of experience in the development of drive and control systems still remain at the heart of every FlowMotion® gate. This not only ensures comfortable passage, maximum personal safety and particularly low operating costs, but is also responsible for the unique robustness and long service lives for which the Magnetic brand has stood for decades.

Find out more about FlowMotion® at  
[www.flowmotion-access.com](http://www.flowmotion-access.com)



**MAGNETIC**®  
ACCESS TO PROGRESS