



## The versatile gate for entrances, wide passageways and escape routes

The mSwing swing door is our specialist in versatility! This starts at the entrances: mSwing is used wherever passage is authorised by staff at a gate or reception desk. Either as a single or a double swing door, depending on the number of visitors expected. It is not only the right choice for the monitored access of visitors, but also for visitors with baggage and for those delivering materials. Its wide barrier elements also make it ideal for wheelchair access.

Thanks to the mPost card-reader pillar, operators can also provide passage using card-reading devices. mSwing, however, is particularly important for setting up escape routes. It is always used whenever many people are present in a building at the same time and appropriately wide escape routes are required. With its passageway width of up to 2400 mm as a double door, and automatic opening if there is a power outage or alarm signal, mSwing also ensures safe paths out of the building in emergency situations.




### Free escape routes

The swing doors allow free passage in the case of a power outage, and a defined position can be set up for when there is an emergency signal. The barrier elements automatically return to the closed position after removal of the alarm contact or the return of electricity.




### Comfortable passage

The smoothly operating motor drive makes the access process particularly comfortable, and its sensitive impact detection ensures maximum user safety.



### Secure access control

Interlocking in the closed state (optional) prevents any forced entry.

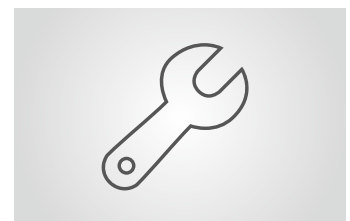

### Rapid installation

Our pedestrian gates are supplied ready for installation. All the selected options have already been installed, and the corresponding parameters preset, before delivery to the point of use. This, and the drilling templates, considerably shorten commissioning times.

# mSwing

## Swing doors

- > As single or double doors for visitor entrances, passage with baggage, transport routes and wheelchair-friendly access
- > For unobstructed escape routes in emergencies
- > Compact accommodation of drive and control systems in the centre column
- > Low impact forces for maximum personal safety
- > Designed for 10,000,000 opening and closing cycles



Technical data	mSwing
Application	Indoor and outdoor
Passage width	Standard: 1000 mm Wide Lane: 1200 mm (more on request)
Barrier element height	Standard: 994 mm (more on request)
Opening/closing time	2,0–5,5 s, depending on barrier element dimensions
Opening angle	Adjustable from 0 – ±300°
Drive technology	MHTM™
Control system	MGC
Voltage	100–240 V AC, 50/60 Hz
Power consumption	Maximum 45 W
Duty cycle	100%
Housing material	Aluminium
Housing height	1092 mm
Housing diameter	Maximum 183 mm
Enclosure rating	IP 54
Weight	About 40 kg (without blocking element)
Temperature range	–30 to +55 °C

### Features

Direction of passage	Uni- or bi-directional
Emergency release	Can be parameterised: fixed position or freely turning
Control system inputs and outputs	8 digital inputs, 4 digital outputs, and 6 relay outputs
Configuration	Via USB interface from external


### Standard colours

	
White aluminium (similar to RAL 9006)	Jet black (similar to RAL 9005)


### Potential applications




mSwing – side view




mSwing – front view

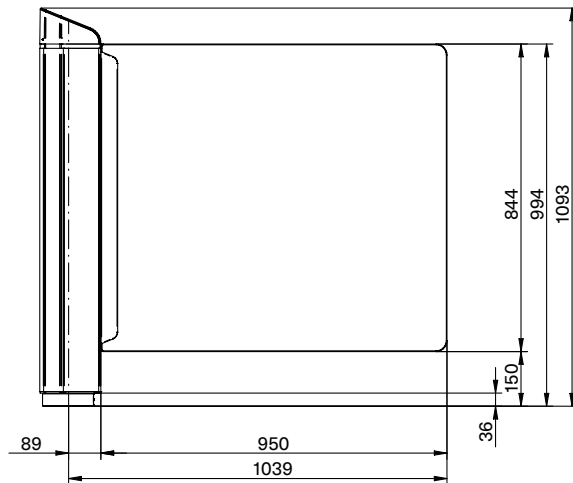


mSwing with U bar – front view

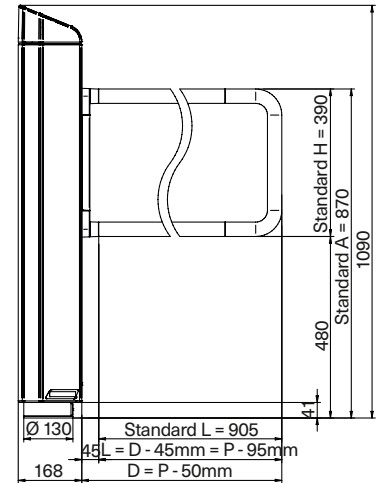


mSwing – top view

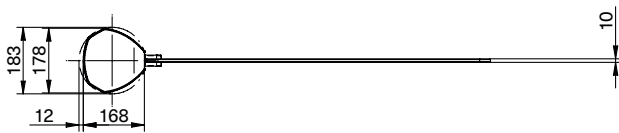

mSwing with U bar – top view

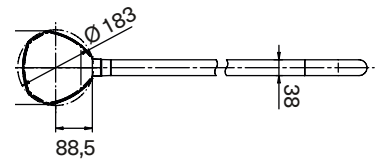

Line configuration with mTripod and mSwing as double swing gate

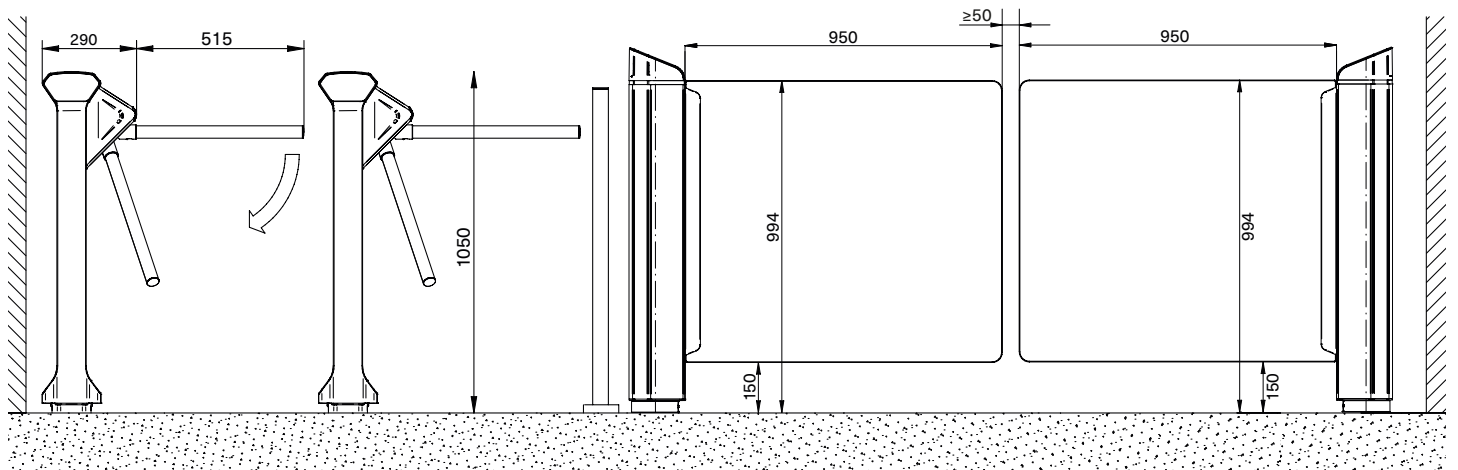

# Access to Progress

Magnetic stands for pioneering products – in every way. Our access control systems for vehicles or pedestrians clear the way for thousands of people every day – at car parks, toll gates, stations, airports and in buildings. Our technology is also pioneering, however: with innovative drives, intelligent control systems and well thought-out details it provides maximum safety and longevity. Are you also on the path to Magnetic?



## Vehicle barriers

Access barriers  
Parking barriers  
Toll barriers  
Special barriers



## Pedestrian gates

Turnstiles  
Swing gates  
Tripod gates  
Retractable gates  
Wing gates



## Terminals

Cars  
Trucks

*Germany*  
**MAGNETIC AUTOCONTROL GMBH**  
Grienmatt 20  
79650 Schopfheim  
Phone +49 7622 695-5  
Fax +49 7622 695-800  
E-mail [info@magnetic-germany.com](mailto:info@magnetic-germany.com)

*Australia*  
**MAGNETIC AUTOMATION PTY LTD**  
38 Metrolink Circuit  
Campbellfield, VIC 3061  
Phone +61 3 9339 2900  
E-mail [info@magnetic-oz.com](mailto:info@magnetic-oz.com)

*Austria*  
**FAAC GMBH**  
Münchner Bundesstraße 123  
5020 Salzburg  
Phone +43 662 853395-0  
E-mail [at.info@faacgroup.com](mailto:at.info@faacgroup.com)

*Benelux countries*  
**FAAC BENELUX NV/SA**  
Industriezone 3B  
8490 Jabbeke  
Belgium  
Phone +32 50 320202  
E-mail [info@magnetic-benelux.com](mailto:info@magnetic-benelux.com)

**MAGNETIC AUTOCONTROL GMBH**  
[www.magnetic-access.com](http://www.magnetic-access.com)

*Brazil*  
**MAGNETIC AUTOCONTROL LTDA**  
Rua Toledo Barbosa 491.  
03061-000 Belenzinho  
São Paulo - SP - Brasil  
Phone +55 11 5660 8500  
E-mail [info@magnetic-br.com](mailto:info@magnetic-br.com)

*China*  
**MAGNETIC CONTROL SYSTEMS CO., LTD**  
No. 3 Building, No. 51  
Lane 1159, Kang Qiao (East) Road  
Kang Qiao Industrial Zone, Shanghai  
Phone +86 21 68182970  
E-mail [info@magnetic-cn.com](mailto:info@magnetic-cn.com)

*France*  
**FAAC FRANCE**  
377 Rue Ferdinand Perrier  
69808 St Priest Cedex  
Phone +33 4 72 21 86 89  
E-mail [info@magnetic-fr.com](mailto:info@magnetic-fr.com)

*India*  
**MAGNETIC FAAC INDIA PVT LTD.**  
2/79, Rajiv Gandhi Salai (OMR)  
(Before Sangeetha Restaurant)  
Oggiyam Thoraipakkam,  
Chennai 600041  
Phone +91 44 421 23297  
E-mail [info@magnetic-india.com](mailto:info@magnetic-india.com)

*Ireland*  
**NATIONAL AUTOMATION LTD**  
Boyle Business Park,  
Boyle, Co. Roscommon  
F52 V590  
Phone + 353 71 9663893  
E-mail [sales@nal.ie](mailto:sales@nal.ie)

*Italy*  
**FAAC S.P.A. SOC. UNIPERSONALE**  
Via Calari, 10  
40069 Zola Predosa (BO)  
Phone +39 05161724  
[controlloaccessi@faactechnologies.com](mailto:controlloaccessi@faactechnologies.com)

*Middle East*  
**FAAC MIDDLE EAST FZE**  
Dubai Silicon Oasis  
PO Box 54886  
Dubai  
United Arab Emirates  
Phone +971 4 3724193  
E-mail [info@magnetic-uae.com](mailto:info@magnetic-uae.com)

*N. and S. America (excl. Brazil)*  
**FAAC INTERNATIONAL, INC**  
3160 Murrell Road  
Rockledge, FL 32955  
USA  
Phone +1 321 635 8585  
E-mail [info@magnetic-usa.com](mailto:info@magnetic-usa.com)

*Scandinavia*  
**FAAC NORDIC AB**  
Box 125  
284 22 Perstorp  
Sweden  
Phone +46 435 77 95 03  
E-mail [info@magnetic-nordic.com](mailto:info@magnetic-nordic.com)

*Southeast Asia*  
**MAGNETIC CONTROL SYSTEMS SDN. BHD**  
No. 17, Jalan Anggerik Mokara 31/54  
Taman Perindustrian Kota Kemuning  
40460 Shah Alam  
Selangor Darul Ehsan  
Malaysia  
Phone +60 3 5123 0033  
E-mail [info@magnetic-malaysia.com](mailto:info@magnetic-malaysia.com)

*Spain*  
**CLEM, S.A.U.**  
Avda. de la Fuente Nueva, nº 12 –  
Nave 8–18  
28703 San Sebastián de los Reyes  
Madrid  
Phone: +34 91 358 11 10  
E-mail: [info@clemsa.es](mailto:info@clemsa.es)

*United Kingdom*  
**FAAC (UK) LIMITED**  
Unit 10 The Hatch Industrial Park,  
Greywell Road,  
Mapledurwell, Basingstoke, Hampshire,  
RG24 7NG  
Phone 01256 318100  
E-mail [sales@faac.co.uk](mailto:sales@faac.co.uk)